

Aladdin Ready 2 Dyne®

Bulk Food Rethermalizer with Refrigeration

Models: R2D2005 & R2D2010

Ready 2 Dyne® combines refrigeration, rethermalization, and food holding functionality into a single programmable unit, making it a convenient option for bulk food retherm.

These conduction units control food temperatures with specially designed fluid filled shelving. When bulk food is loaded into the units, the temperature of the fluid inside the shelving remains low, keeping foods chilled until the pre-programmed time of your choice. At that point, the same fluid is quickly heated, warming food to a precise serving temperature as it circulates within each shelf. After rethermalization is complete, the unit enters a holding cycle to maintain food quality and temperature until it is ready to be served.



Model R2D2005 Shown.

Standard Features


- Holds 2 full-size or 4 half-size sheet pans per shelf
- Programmable for 6 meal recipes daily
- Rethermalizes bulk food pans within 2 hours (HACCP compliance)
- Temperature range between 34-230°F/1.1-110°C
- Automatic Chill, Retherm/Bake, Holding cycle changes
- 5 hour holding time capability
- User-friendly display w/battery backup
 - Time of day
 - Time remaining for function
 - Actual temperature
- Controller displays current operational status— Chill, Retherm/Bake, Holding
- Controller — °C/°F — selectable
- Conveniently mobile
- Minimizes heat loss when doors are open
- Easy to operate — reduces labor costs
- Easy to load and serve
- Easy access for cleaning
- 20 gauge stainless steel cabinet, rust/corrosion resistant
- Scratch resistant hard coated anodized aluminum shelves



Aladdin Ready 2 Dyne®

Bulk Food Rethermalizer with Refrigeration

Models: R2D2005 & R2D2010

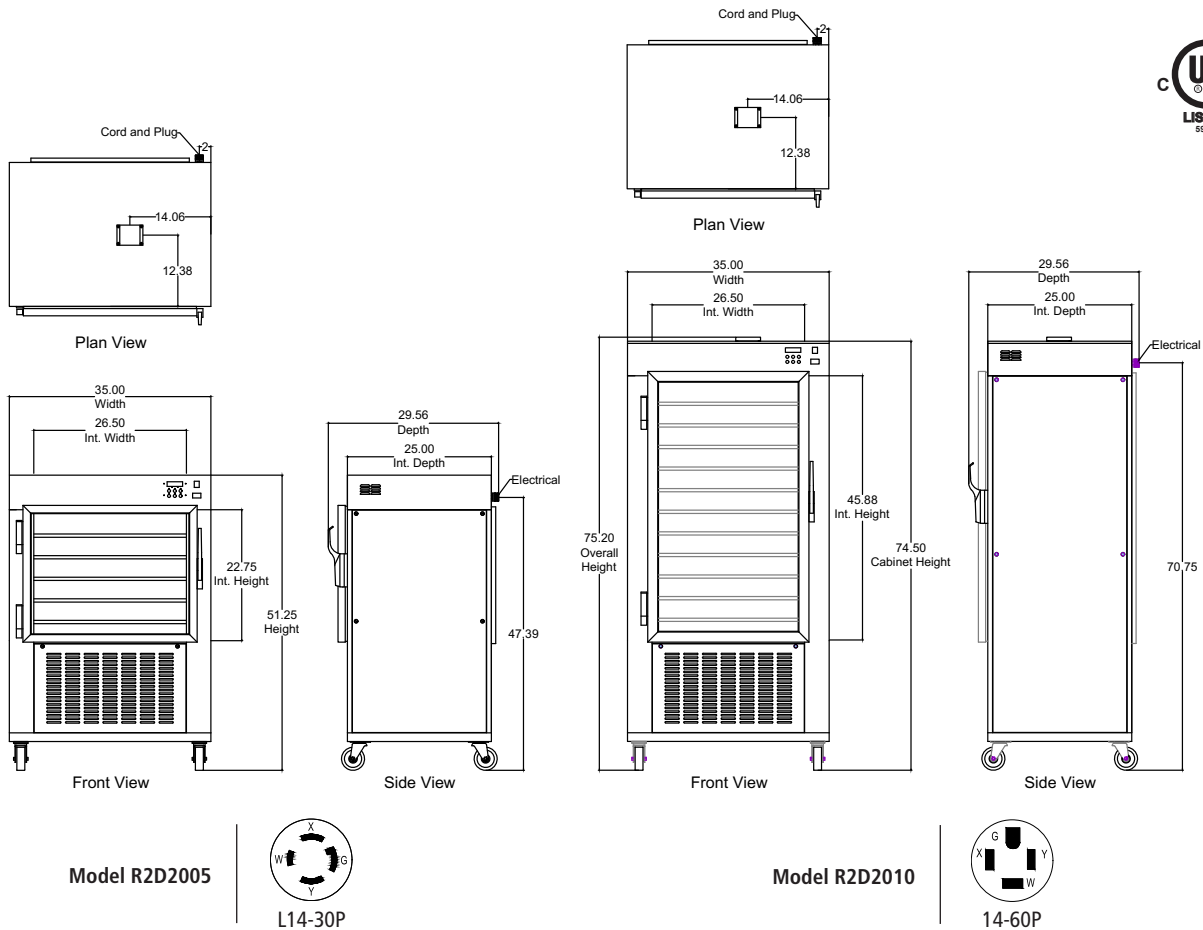

Model R2D2005



L14-30P

Model R2D2010



14-60P

Ready 2 Dyne® Technical Specifications

Model Number	Capacity	Electrical	Cord Set/Plug	Length	Width	Height	Weight	Shipping Weight
<input type="checkbox"/> R2D2005	5 Shelf 10 full-size or 20 half-size steam pans	Volts: 208-240 Hertz: 50/60 Phase: Single Max amp draw: 26 Min. amp capacity: 30 Watts: 5250 (@ 208v)	NEMA L14-30P (4-wire) 10' (3.04 m) cord with twist-lock plug	29.56" (75.1 cm)	35" (88.9 cm)	51.25" (130.2 cm)	432 lbs. (195.9 kg)	633 lbs. (287.1 kg)
<input type="checkbox"/> R2D2010	10 Shelf 20 full-size or 40 half-size steam pans	Volts: 208-240 Hertz: 50/60 Phase: Single Max amp draw: 53 Min. amp capacity: 60 Watts: 10,500 (@ 208v)	NEMA 14-60P (4-wire) 10' (3.04 m) cord with straight-blade plug	29.56" (75.1 cm)	35" (88.9 cm)	74.5" (189.2 cm)	583 lbs. (264.4 kg)	794 lbs. (360.1 kg)

¹ Refer to Thermodyne agency listings for corresponding models 700DP & 1500DP.

Visit aladdintemprite.com/patents for patent information.
 250 E. Main St. | Hendersonville, TN 37075 | Customer Service: 800.888.8018 | Tech Service: 800.888.5426 | Fax: 888.812.9956 | aladdintemprite.com
 ©2021 Aladdin Temp-Rite®. All rights reserved. Note: Specifications are subject to change without notice.



S211123R2DYN

an Ali Group Company



The Spirit of Excellence